

Feature:

- Flexible, Free to crimp
- Can be cut and connected to extend
- Low input voltage, safe
- High efficiency and stability, no shadows at the junction
- Adhesive backing for an easy peel-and-stick installation



RoHS
COMPLIANT

Application


- ◆ Mall lighting, Home lighting, Indoor project and etc.

Product Specification

Basic Data	Model.	L22B100QXXAHDA6
	Input Voltage	DC 24V
	Power (W)	10
	Lumen (lm)	1000
	Efficiency (lm/W)	100
	CCT (°K)	XX = 30 3000 / 40 4000
	CRI	R80
	Beam Angle(°)	120
	Protection Grade (Technology)	IP 20
	Life Time (hrs)	L70B50:36000H
	LED Quantity (pcs)	512
	Working Temperature	-10°C~40°C
	Working Humidity	30%~65%RH
Maximum Connecting Length	5 mt	
Appearance Information	Product Size(mm)	L5000 x W8 x H1,4 mm
	Material	/
	Color	Two sided white FPC
Packing Information	Carton Size(mm)	420 x 275 x 310 mm
	Quantity/CTN(pcs)	50
	Quantity/Container(pcs)	20GP: 34000 40HQ: 80000

Product Size(mm):

L22B100QXXAHDA6:

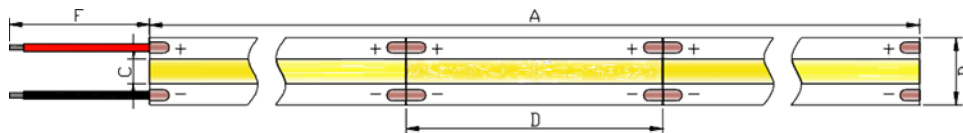

A: Length (mm)	B: Width (mm)	C: Colloid Width (mm)	D: Cut Length (mm)	E: Thickness (mm)	F: Length (mm)
5000 +/- 10	8 +/- 0,2	3 +/- 0,2	31,25 +/- 0,4	1,8 +/- 0,2	150 +/- 5

Notes :

- ◆ Specifications above are typical values. There is deviation between measured parameters and typical values. The light distribution curve and light illuminance are the test data of neutral white samples and for reference only.