

Feature:

- Flexible, Free to crimp
- Can be cut and connected to extend
- Low input voltage, safe
- High efficiency and stability, no shadows at the junction
- Adhesive backing for an easy peel-and-stick installation



Application


- ◆ Mall lighting, Home lighting, Indoor project and etc.

Product Specification

	Model.	L22C096DXXBDYA0	L22C144DXXBDYA0
Basic Data	Input Voltage	DC 24V	
	Power (W)	9,6	14,4
	Lumen (lm)	27 1008 / 30 1065 / 40 1104	27 1512 / 30 1598 / 40 1656
	Efficiency (lm/W)	Y = E 105 / J 111 / O 115	
	CCT (°K)	XX = 27 2700 / 30 3000 / 40 4000	
	CRI	R90	
	Beam Angle(°)	120	
	Protection Grade (Technology)	IP 20	
	Life Time (hrs)	L70B50:36000H	
	LED Quantity (pcs)	140	
	Working Temperature	-10°C~40°C	
	Working Humidity	30%~65%RH	
	Maximum Connecting Length	5 mt	
	Appearance Information	Product Size(mm)	L5000 x W10 x H1,4 mm
Material		/	
Color		Two sided white FPC	
Packing Information	Carton Size(mm)	420 x 275 x 310 mm	
	Quantity/CTN(pcs)	50	
	Quantity/Container(pcs)	20GP: 34000 40HQ: 80000	

Product Size(mm):

L22C096DXXBDYA0 – L22C144DXXBDYA0

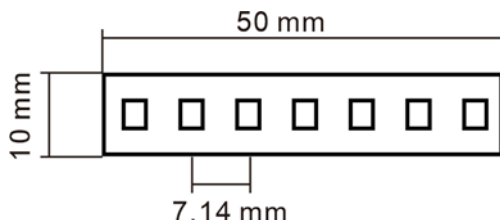

Notes:

- ◆ Specifications above are typical values. There is deviation between measured parameters and typical values. The light distribution curve and light illuminance are the test data of neutral white samples and for reference only.